

## CZRW55C2V4 Thru 55C39

Voltage: 2.4 - 39 Volts  
Power: 410 mWatts




### Features

- Planar Die construction
- 410mW Power Dissipation
- Zener Voltages from 2.4V - 39V
- Ideally Suited for Automated Assembly Processes

### Mechanical data

- Case: SOD-123, Molded Plastic
- Terminals: Solderable per MIL-STD-202, Method 208
- Approx. Weight: 0.008 gram

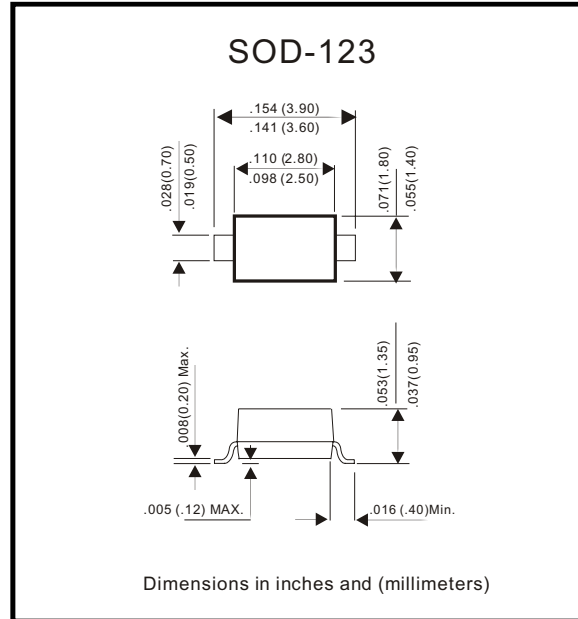

### Maximum Ratings and Electrical Characteristics

Parameter	Symbol	Value	Units
Power Dissipation (Note A) at 25°C	$P_D$	410	mW
Peak Forward Surge Current Surge, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method) (Note B)	$I_{FSM}$	2.0	Amps
Operating Junction and Storage Temperature Range	$T_J$	-55 to +150	°C

#### NOTES:

- A. Mounted on 5.0mm<sup>2</sup>(.013mm thick) land areas.
- B. Measured on 8.3ms, single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.

## Maximum Ratings and Electrical Characteristics







(TA=25°C unless otherwise noted) V<sub>F</sub>=1.2V max, I<sub>F</sub>=100mA for all types

Part Number	Nominal Zener Voltage			Max. Zener Impedance				Max Reverse Leakage Current		Max Zener Current
	V <sub>Z</sub> @ I <sub>ZT</sub>			Z <sub>ZT</sub> @ I <sub>ZT</sub>		Z <sub>ZK</sub> @ I <sub>ZK</sub>		I <sub>R</sub> @ V <sub>R</sub>		I <sub>ZM</sub> @ T <sub>A</sub>
	Nom. V	Min. V	Max. V	Ohm	mA	Ohm	mA	nA	V	mA
<b>410 mWatts Zener Diodes</b>										
CZRW55C2V4	2.4	2.28	2.56	85	5	600	1	100000	1	-
CZRW55C2V7	2.7	2.5	2.9	83	5	500	1	75000	1	134
CZRW55C3V0	3.0	2.8	3.2	95	5	500	1	50000	1	118
CZRW55C3V3	3.3	3.1	3.5	95	5	500	1	25000	1	109
CZRW55C3V6	3.6	3.4	3.8	95	5	500	1	15000	1	100
CZRW55C3V9	3.9	3.7	4.1	95	5	500	1	10000	1	92
CZRW55C4V3	4.3	4	4.6	95	5	500	1	5000	1	84
CZRW55C4V7	4.7	4.4	5	78	5	500	1	5000	1	76
CZRW55C5V1	5.1	4.8	5.4	60	5	480	1	100	0.8	67
CZRW55C5V6	5.6	5.2	6	40	5	400	1	100	1	59
CZRW55C6V2	6.2	5.8	6.6	10	5	200	1	100	2	54
CZRW55C6V8	6.8	6.4	7.2	8	5	150	1	100	3	49
CZRW55C7V5	7.5	7	7.9	7	5	50	1	100	5	44
CZRW55C8V2	8.2	7.7	8.7	7	5	50	1	100	6	40
CZRW55C9V1	9.1	8.5	9.6	10	5	50	1	100	7	36
CZRW55C10	10.0	9.4	10.6	15	5	70	1	100	7.5	33
CZRW55C11	11.0	10.4	11.6	20	5	70	1	100	8.5	30
CZRW55C12	12.0	11.4	12.7	20	5	90	1	100	9	28
CZRW55C13	13.0	12.4	14.1	25	5	110	1	100	10	25
CZRW55C15	15	13.8	15.6	30	5	110	1	100	11	23
CZRW55C16	16	15.3	17.1	40	5	170	1	100	12	20
CZRW55C18	18	16.8	19.1	50	5	170	1	100	14	18
CZRW55C20	20	18.8	21.2	50	5	220	1	100	15	17
CZRW55C22	22	20.8	23.3	55	5	220	1	100	17	16
CZRW55C24	24	22.8	25.6	80	5	220	1	100	18	13
CZRW55C27	27	25.1	28.9	80	5	250	1	100	20	12
CZRW55C30	30	28	32	80	5	250	1	100	22.5	10
CZRW55C33	33	31	35	80	5	250	1	100	25	9
CZRW55C36	36	34	38	90	5	250	1	100	27	9
CZRW55C39	39	37	41	90	5	300	1	100	29	8

**NOTE:**

1. Tolerance and Type Number Designation. The type numbers listed have a standard tolerance on the nominal zener voltage of ±5%.
2. Specials Available Include:
  - A. Nominal zener voltages between the voltages shown and tighter voltage tolerances.
  - B. Matched sets.
3. Zener Voltage (V<sub>Z</sub>) Measurement. Guarantees the zener voltage when measured at 90 seconds while maintaining the lead temperature (T<sub>L</sub>) at 300C, from the diode body.
4. Zener Impedance (Z<sub>Z</sub>) Derivation. The zener impedance is derived from the 60 cycle ac voltage, which results when an AC current having an rms value equal to 10% of the dc zener current (I<sub>ZT</sub> or I<sub>ZK</sub>) is superimposed on I<sub>ZT</sub> or I<sub>ZK</sub>.
5. Surge Current (I<sub>R</sub>) Non-Repetitive. The rating listed in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current, I<sub>ZT</sub>, per JEDEC registration; however, actual device capability is as described in Figure 5.

## Rating and Characteristic Curves (CZRW55C2V4 Thru CZRW55C39)

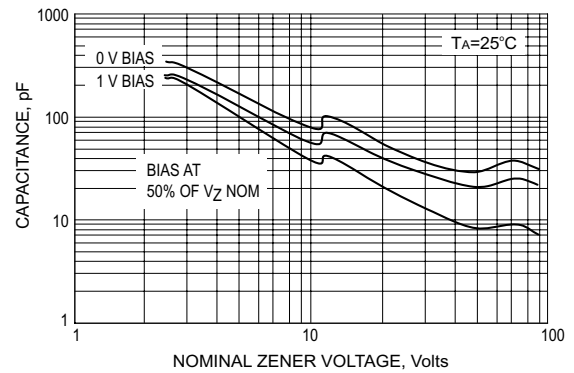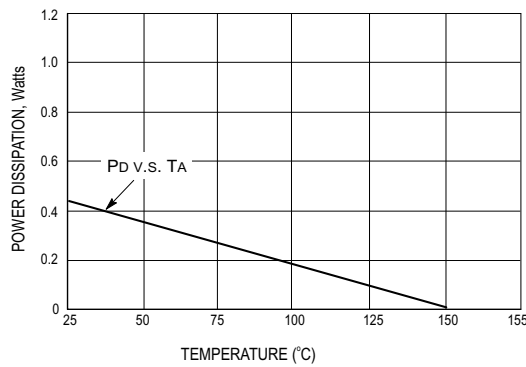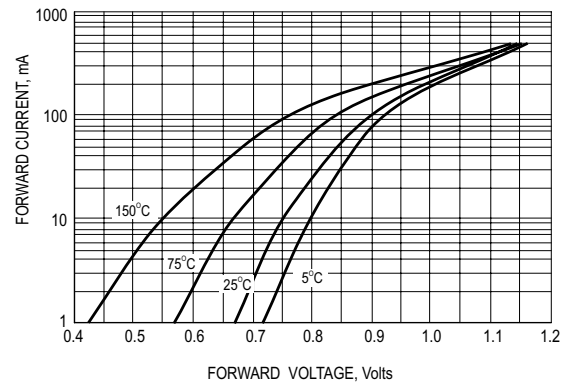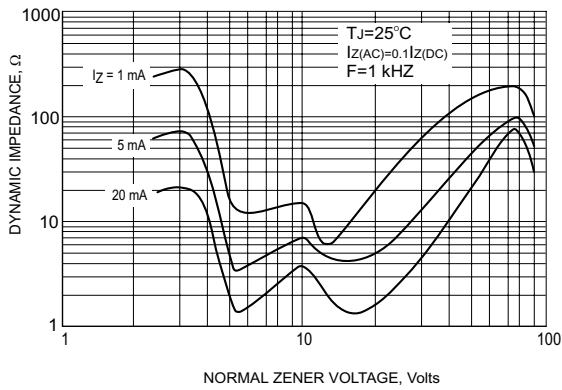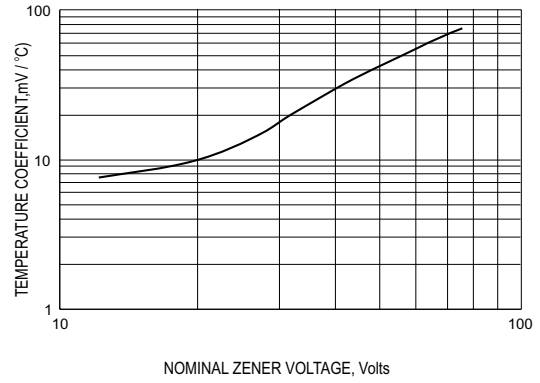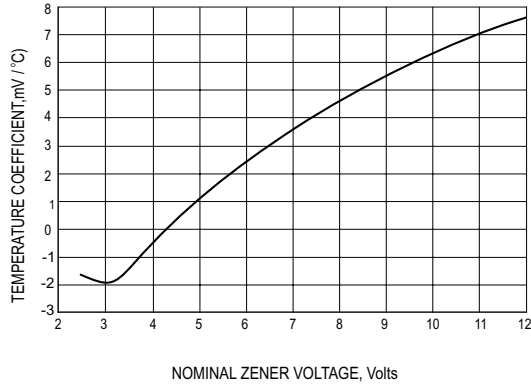

## Rating and Characteristic Curves (CZRW55C2V4 Thru CZRW55C39)

