


CFRB201 Thru CFRB207

Reverse Voltage: 50 - 1000 Volts
Forward Current: 2.0 Amp




Features

- Ideal for surface mount applications
- Easy pick and place
- Plastic package has Underwriters Lab. flammability classification 94V-0
- Built-in strain relief
- High surge current capability

Mechanical data

- Case: JEDEC DO-214AA molded plastic
- Terminals: solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Approx. Weight: 0.093 gram

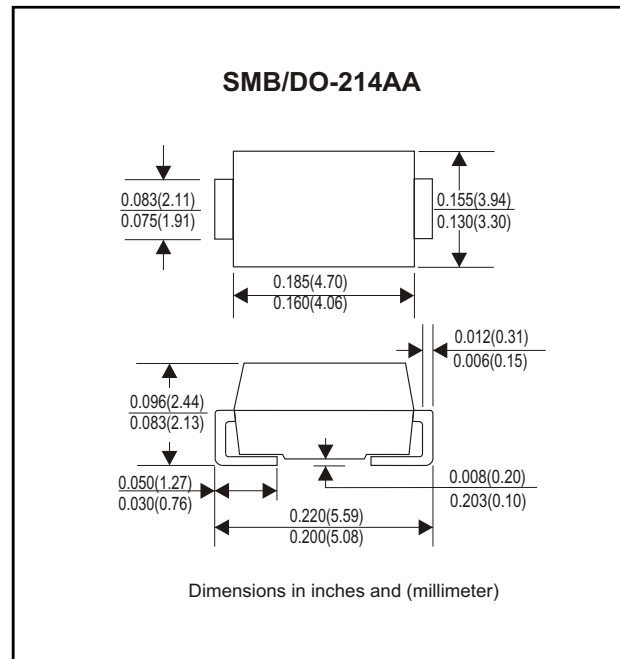

Maximum Ratings and Electrical Characteristics

Parameter	Symbol	CFRB 201	CFRB 202	CFRB 203	CFRB 204	CFRB 205	CFRB 206	CFRB 207	Unit
Max. Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Max. DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Max. RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Peak Surge Forward Current 8.3ms single halfsine-wave superimposed on rate load (JEDEC method)	I _{FSM}	70							A
Max. Average Forward Current	I _o	2.0							A
Max. Instantaneous Forward Current at 2.0 A	V _F	1.3							V
Reverse recovery time	T _{rr}	100			250		500		nS
Max. DC Reverse Current at Rated DC Blocking Voltage Ta=25°C Ta=100°C	I _R	5.0 50							uA
Max. Thermal Resistance (Note 1)	R _{θJL}	20							°C/W
Operating Junction Temperature	T _j	-55 to +150							°C
Storage Temperature	T _{STG}	-55 to +150							°C

Note 1: Thermal resistance from junction to lead, 8.0mm square (0.13mm thick) land areas.

Rating and Characteristic Curves (CFRB201 Thru CFRB207)

Fig. 1 - Reverse characteristics

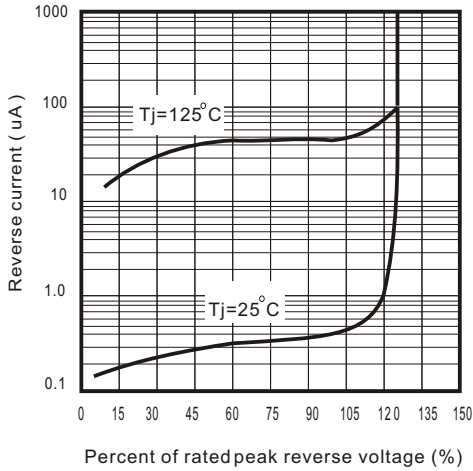


Fig.2 - Forward characteristics

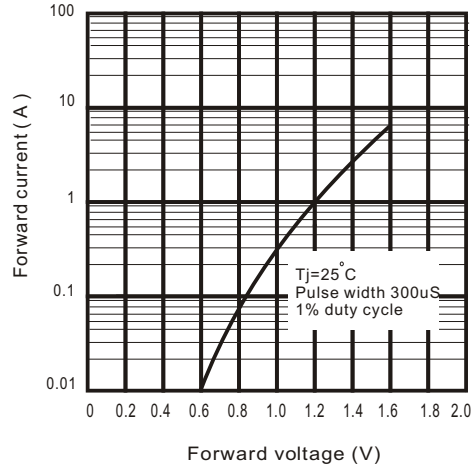


Fig. 3 - Junction capacitance

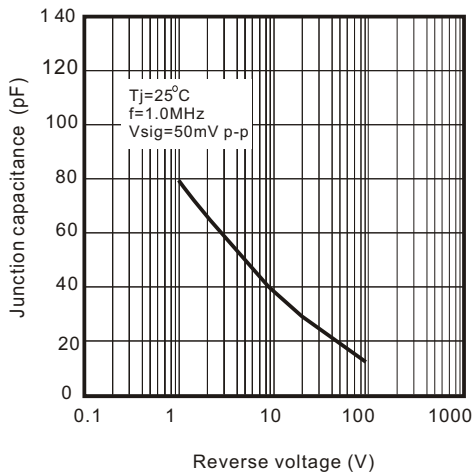


Fig. 4 - Non repetitive forward surge current

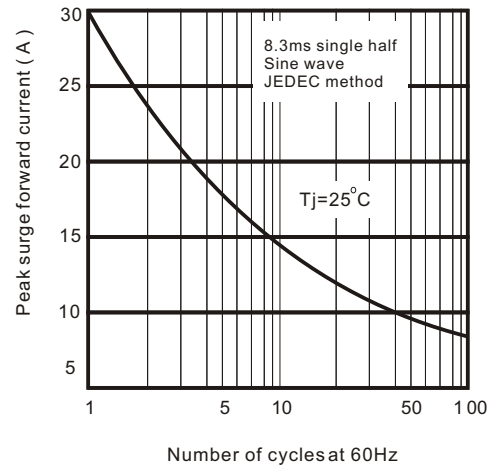


Fig. 5 - Test circuit diagram and Reverse recovery time characteristics

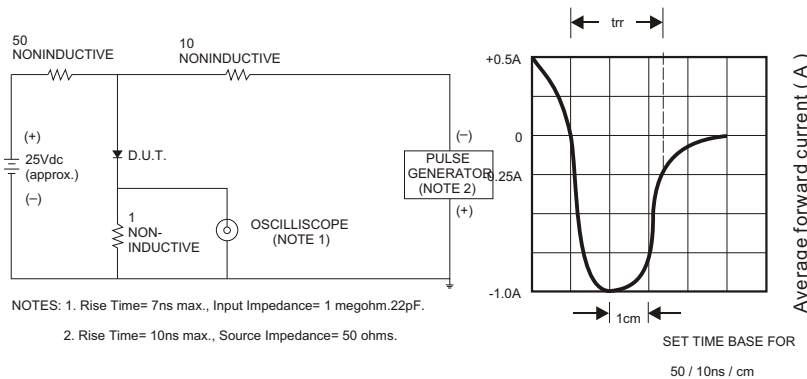


Fig. 6 - Current derating curve

