1 of 3 Creation Date : April 06, 2017 (GMT)

CGA2B3X7R1H103K050BE










TDK item description CGA2B3X7R1H103KT***S

Applications	Automotive Grade	
Feature	Soft Termination AEC-Q200 AEC-Q200	
Series	CGA2(1005) [EIA 0402]	
Status	Production	



	Size
Length(L)	1.00mm +0.15,-0.05mm
Width(W)	0.50mm +0.10,-0.05mm
Thickness(T)	0.50mm +0.10,-0.05mm
Terminal Width(B)	0.10mm Min.
Terminal Spacing(G)	0.30mm Min.
Recommended Land Pattern (PA)	0.30mm to 0.50mm
Recommended Land Pattern (PB)	0.35mm to 0.45mm
Recommended Land Pattern (PC)	0.40mm to 0.60mm

Electrical Characteristics		
Capacitance	10nF ±10%	
Rated Voltage	50VDC	
Temperature Characteristic	X7R(±15%)	
Dissipation Factor (Max.)	5%	
Insulation Resistance (Min.)	10000ΜΩ	

Other	
Soldering Method	Reflow
AEC-Q200	Yes
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	10000pcs

[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

CGA2B3X7R1H103K050BE














Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

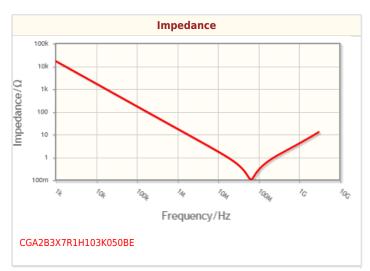


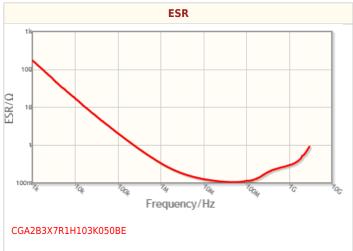

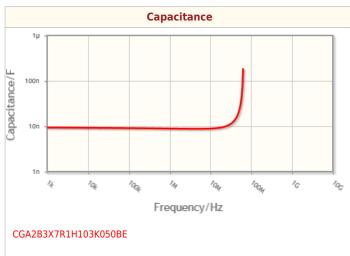

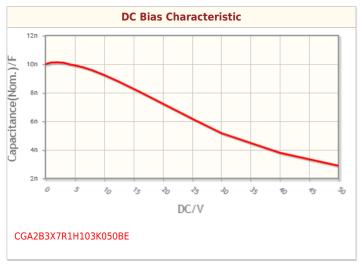

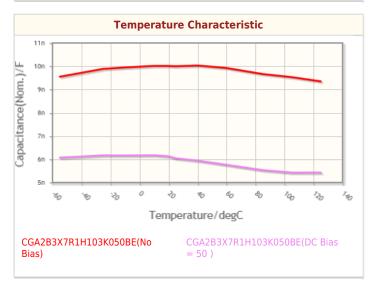

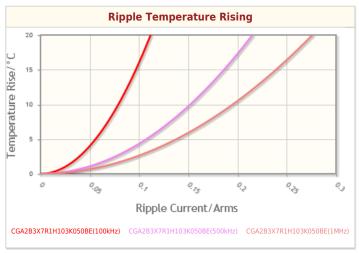

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.



CGA2B3X7R1H103K050BE










Associated Images

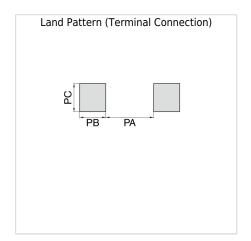

[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.