


## Features

1. Normally open, single pole single throw.
2. Control 350VAC or DC voltage.
3. Switch 130mA loads.
4. LED control current, 5mA.
5. Low ON-resistance.
6. dv/dt, >500V/mS.
7. Isolation test voltage, 1500VRMS.

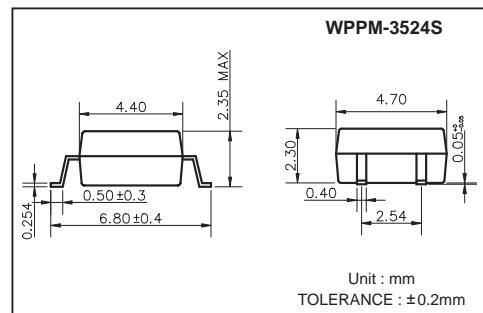

Part Numbering System & Part Marking System: Page 3 & 4.


## Absolute Maximum Ratings

(Ta=25°C)

Emitter (Input)	Detector (Output)
Reverse Voltage.....5.0V	Output Breakdown Voltage .....±350V
Continuous Forward Current .....50mA	Continuous Load Current .....±130mA
Peak Forward Current .....1A	Power Dissipation .....500mW
Power Dissipation .....100mW	
Derate Linearly from 25°C .....1.3mW/°C	

General Characteristics	
Isolation Test Voltage .....1500VRMS	Storage Temperature Range ...-40°C to +125°C
Isolation Resistance	Operating Temperature Range...-30°C to +85°C
Vio = 500V, TA = 25°C .....≥10 <sup>10</sup> Ω	Junction Temperature.....100°C
Total Power Dissipation .....550mW	Soldering Temperature,
Derate Linearly from 25°C .....2.5mW/°C	2mm from case, 10 sec .....260°C

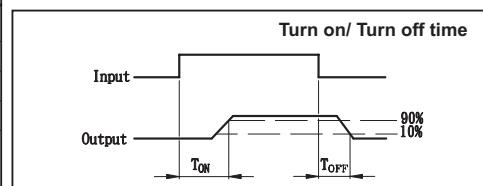

## Electro-optical Characteristics

(Ta=25°C)


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Emitter (Input)						
Forward Voltage	VF	IF = 10mA		1.2	1.5	V
Operation Input Current	I <sub>FON</sub>	V <sub>L</sub> = ±20V, I <sub>L</sub> = 100mA, t = 10ms		5		mA
Recovery Input Current	I <sub>OFF</sub>	V <sub>L</sub> = ±20V, I <sub>L</sub> ≤ 5μA	0.2			mA
Detector (Output)						
Output Breakdown Voltage	V <sub>B</sub>	I <sub>B</sub> = 50μA	350			V
Output Off-State Leakage	I <sub>TOFF</sub>	V <sub>T</sub> = 100V, I <sub>F</sub> = 0mA	0.2	1		uA
I/O Capacitance	C <sub>IISO</sub>	I <sub>F</sub> = 0, f = 1MHz	6			pF
ON Resistance	R <sub>ON</sub>	I <sub>L</sub> = 100mA, I <sub>F</sub> = 10mA	20	30		Ω
Turn-On Time	T <sub>ON</sub>	I <sub>F</sub> = 10mA, V <sub>L</sub> = ±20V	0.3	1.0		ms
Turn-Off Time	T <sub>OFF</sub>	t = 10ms, I <sub>L</sub> = ±100mA	0.7	1.5		ms

## MOS Relay Schematic and Wiring Diagrams


Type	Schematic	Output configuration	Load	Connection	Wiring Diagrams
3524S		1a	AC/DC	A	

## Data Curve


**Fig.1** Load current vs. ambient temperature  
Allowable ambient temperature:  
-40°C to +85°C

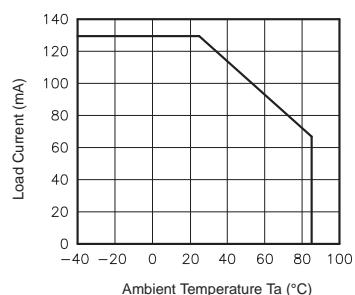


**Fig.2** On resistance vs. ambient temperature  
Across terminals 3 and 4 pin  
LED current: 5mA  
Continuous load current: 130mA(DC)

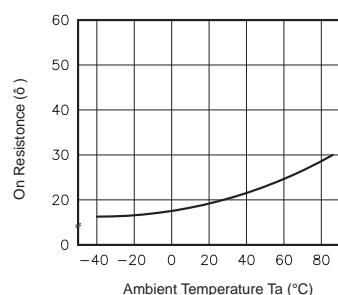


**Fig.3** Turn on time vs. ambient temperature  
Load voltage 350V(DC)  
LED current: 5mA  
Continuous load current: 130mA(DC)

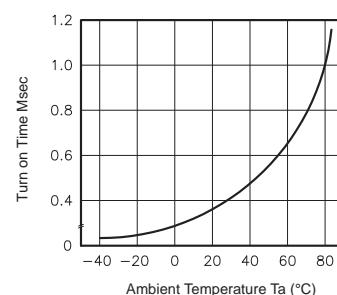


**Fig.4** Turn off time vs. ambient temperature  
LED current: 5mA; Load voltage:  
350V(DC)  
Continuous load current: 130mA(DC)

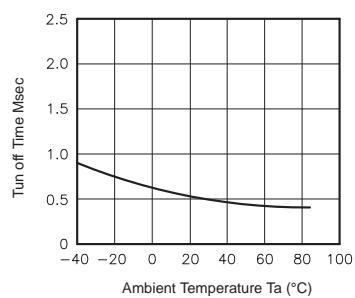


**Fig.5** LED operate vs. ambient temperature  
Load voltage 350V(DC)  
Continuous load current: 130mA(DC)

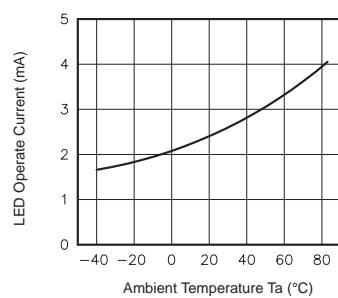


**Fig.6** LED turn off current vs. ambient temperature  
Load voltage 350V(DC)  
Continuous load current: 130mA(DC)

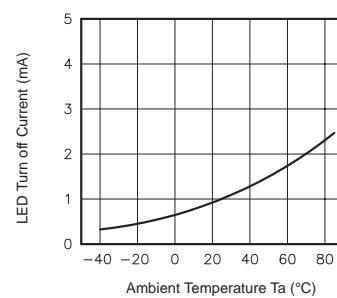


**Fig.7** LED dropout voltage vs. ambient temperature  
LED current: 5 to 50mA

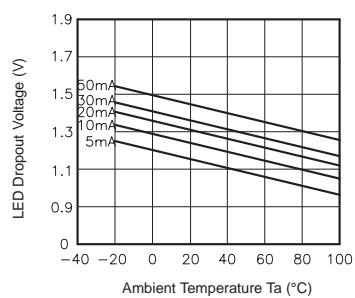


**Fig.8** Voltage vs. current characteristics of output at MOS FET portion  
Measured portion: across terminals 3 and 4 pin  
Ambient temperature: 25°C

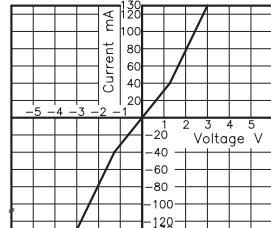


**Fig.9** Off state leakage current  
Across terminals 3 and 4 pin  
Ambient temperature: 25°C

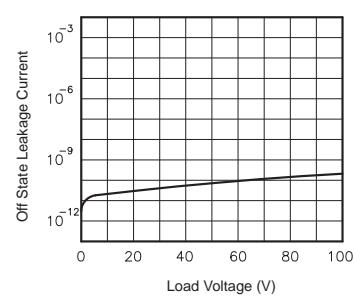

**Fig.10** LED forward current vs. turn on time  
Across terminals 3 and 4 pin;  
Load voltage: 350V (DC);  
Continuous load current: 130mA (DC);  
Ambient temperature: 25°C

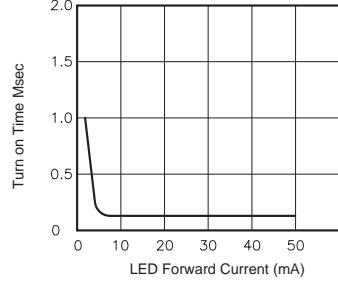

**Fig.11** LED forward current vs. turn off time  
Across terminals 3 and 4 pin;  
Load voltage: 350V (DC);  
Continuous load current: 130mA (DC);  
Ambient temperature: 25°C

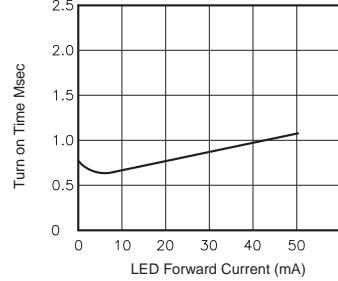

**Fig.12** Applied voltage vs. output capacitance  
Across terminals 3 and 4 pin  
Frequency: 1MHz  
Ambient temperature: 25°C

