

Power Divider, 2-way, 0.45-7.5GHz, SMA Female

WM2PD-0.45-7.5-S





Parameter	Low Band	Mid Band	High Band	Unit
Frequency Range	450-600	600-4000	4000-7500	MHz
Impedance	50			Ω
Return Loss (Port S)	10	10	10	dB, min.
Return Loss (Port 1-2)	12	12	12	dB, min.
Insertion Loss above 3.01dB	0.5	1.0	1.5	dB, max.
Isolation	14	16	16	dB, min.
Amplitude Unbalance ($\pm$) ¹	0.1	0.3	0.6	dB, max.
Phase Unbalance ($\pm$) ¹	1	4	8	Degree, max.
Input Power (CW) ²	30			W, max.
Combining Power (CW) ²	0.5			W/port, max.
DC Current	0.35			A/port, max.



Connector Interface	SMA Female
Operating Temperature ³	-40 to +85 °C
Storage Temperature	-55 to +100 °C
Nominal Weight	85 g (3 oz)
Operating Humidity	10-90% (non-condensing)
Operating Environment	Indoor Use Only
HTSUS Code	8548.00.0000
ECCN	EAR99

RoHS Status ⁴	RoHS3 Compliant
REACH Status ⁴	REACH Unaffected
Enclosure Material	Aluminum
Connectors Material	Brass, Gold Plated
Contacts Material	Beryllium Copper, Gold Plated
Insulators Material	Virgin PTFE
Finish	Green Paint
Country of Origin	United States of America



1. With reference to average.
2. All output ports should be terminated in a 50-ohm load with 1.2:1 max VSWR.
3. Electrical specifications are tested at +25 °C.
4. To the best of our knowledge at the time of publication.



Typical Performance at +25 °C

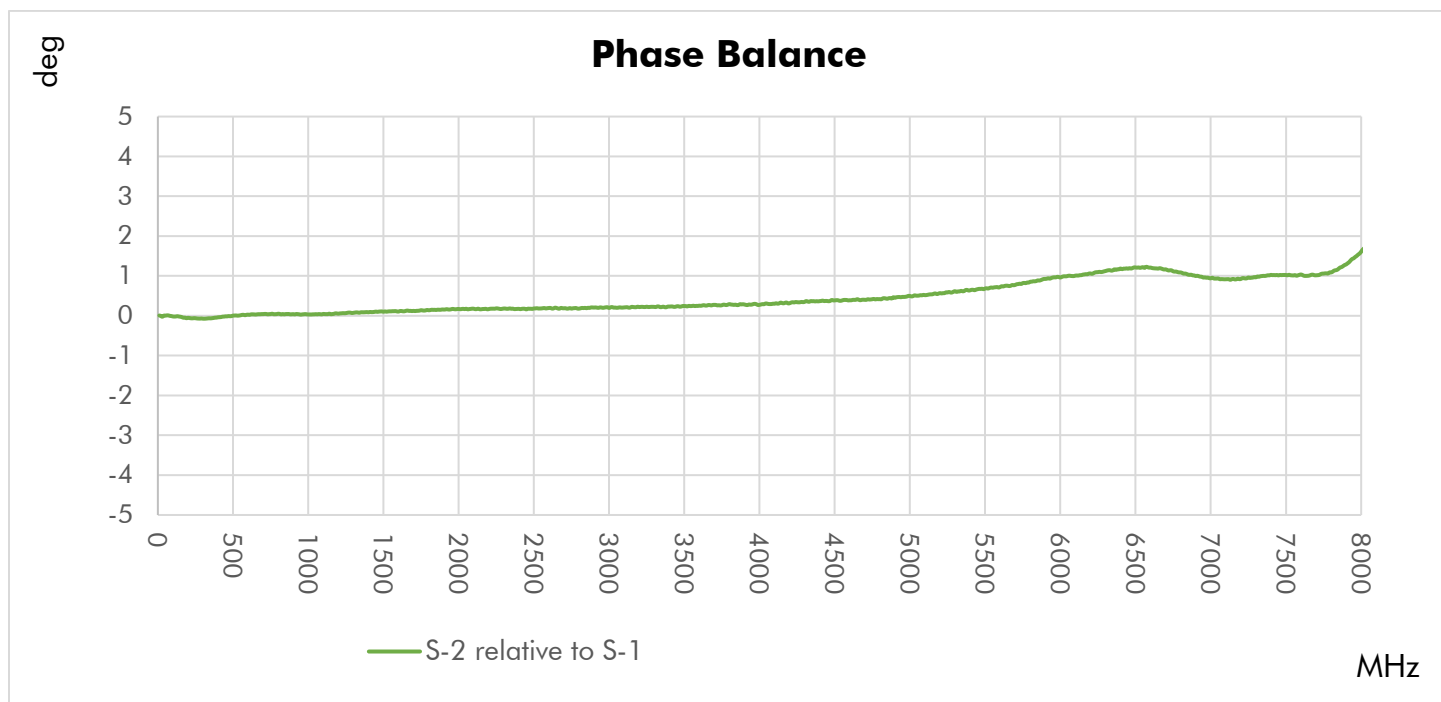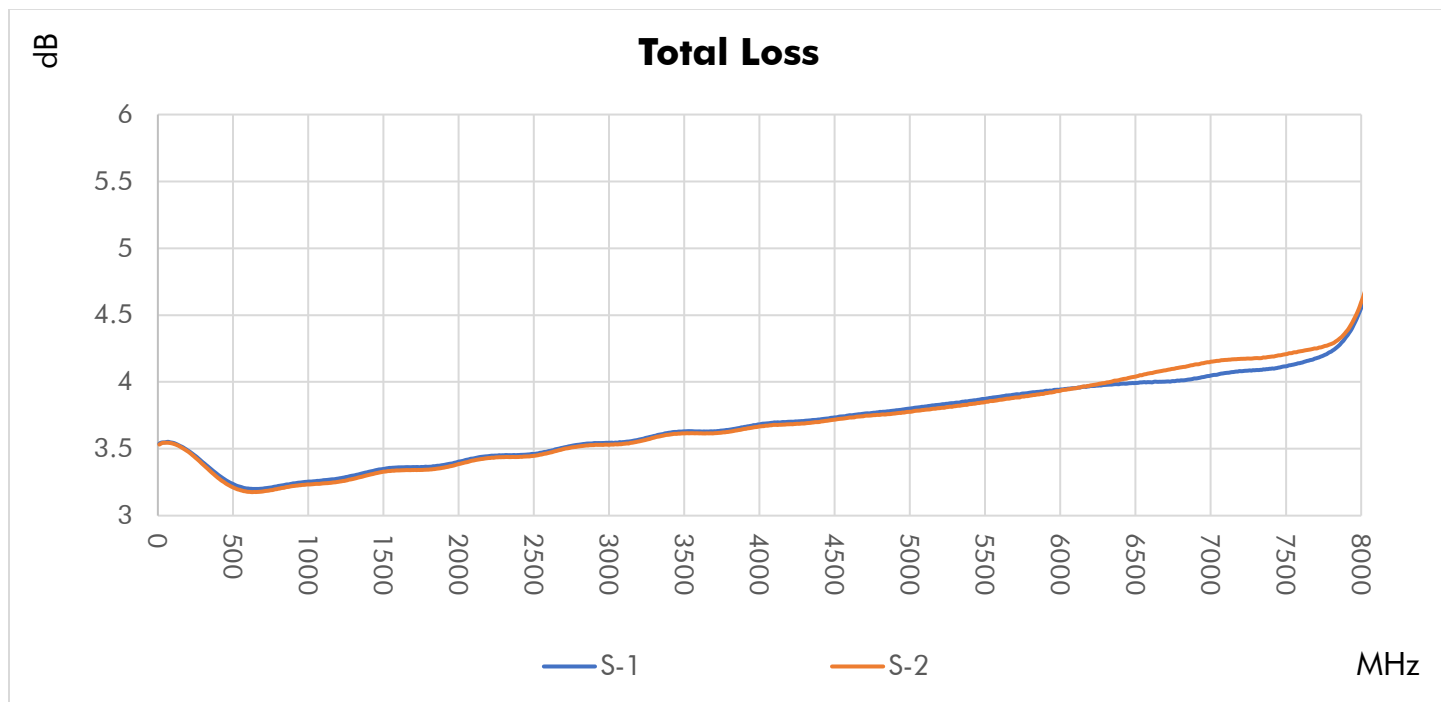

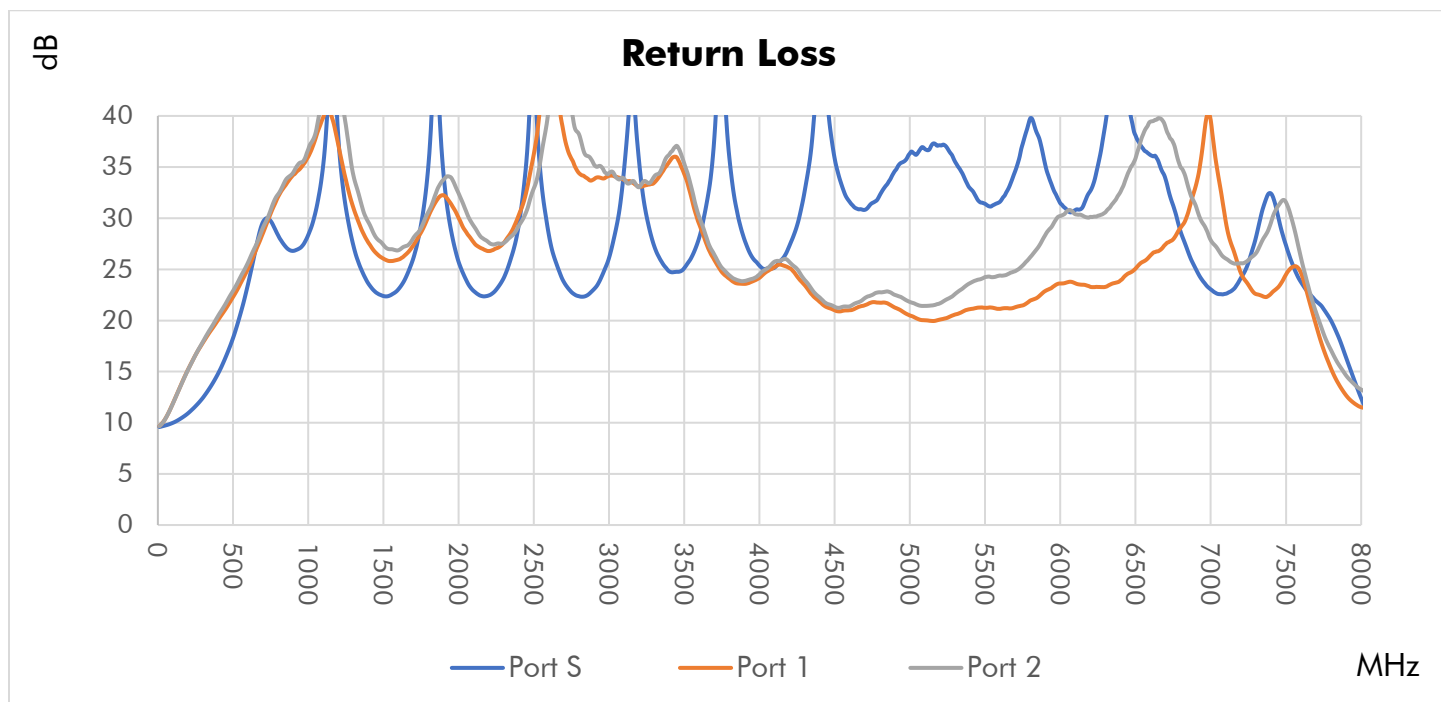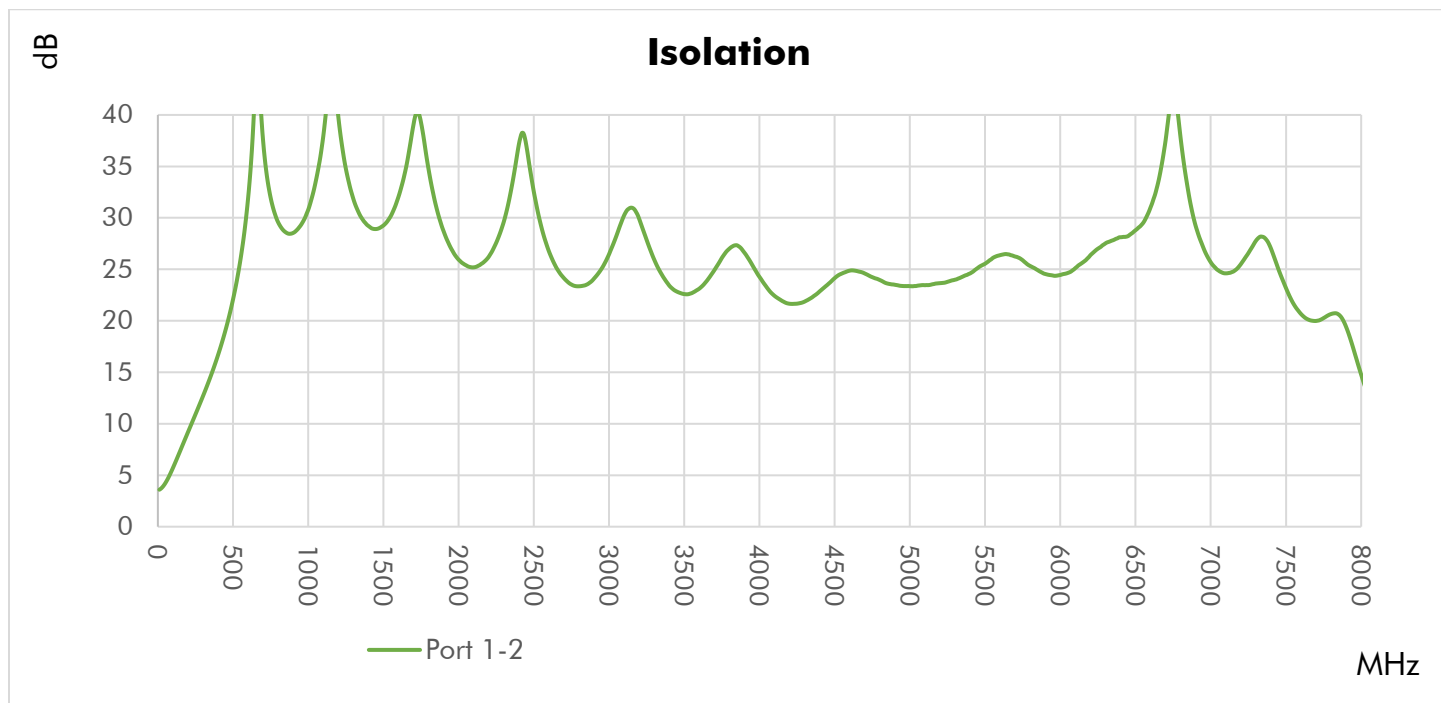


Typical Performance Over Temperature

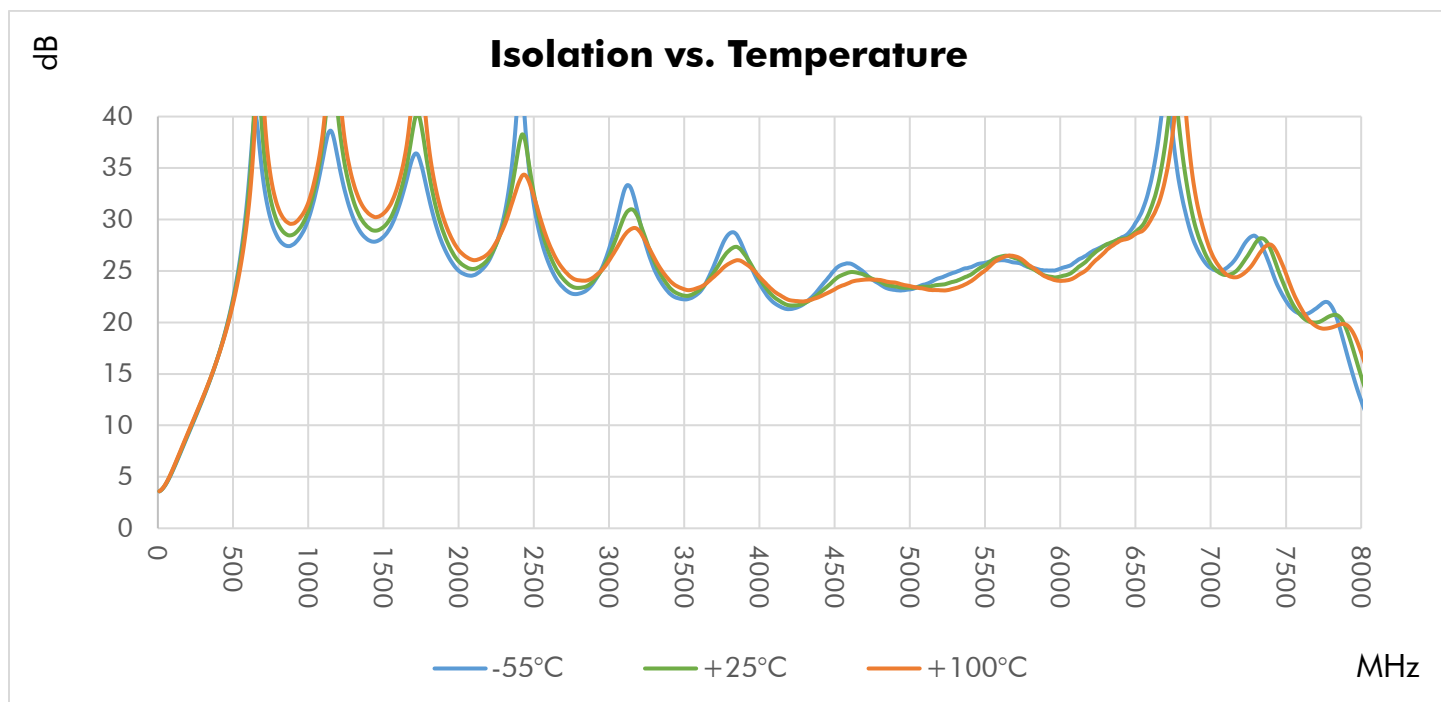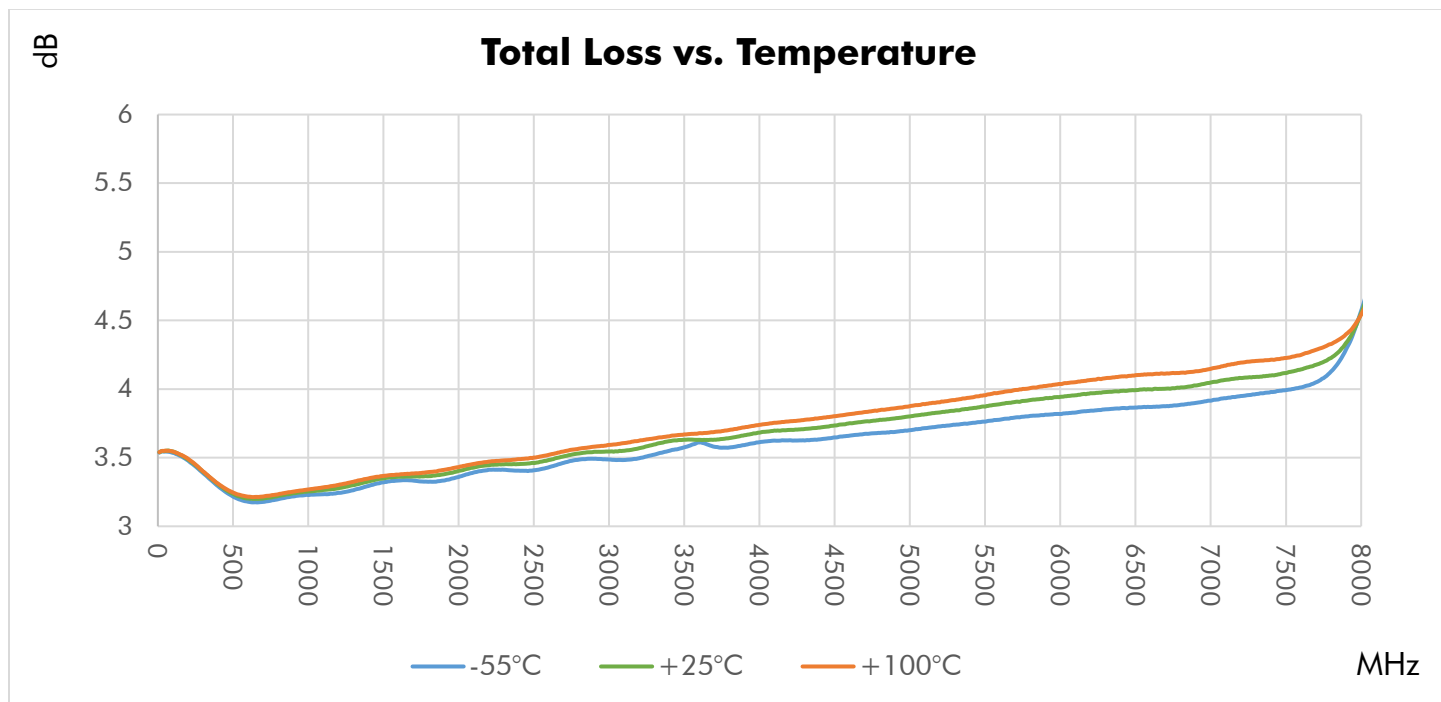

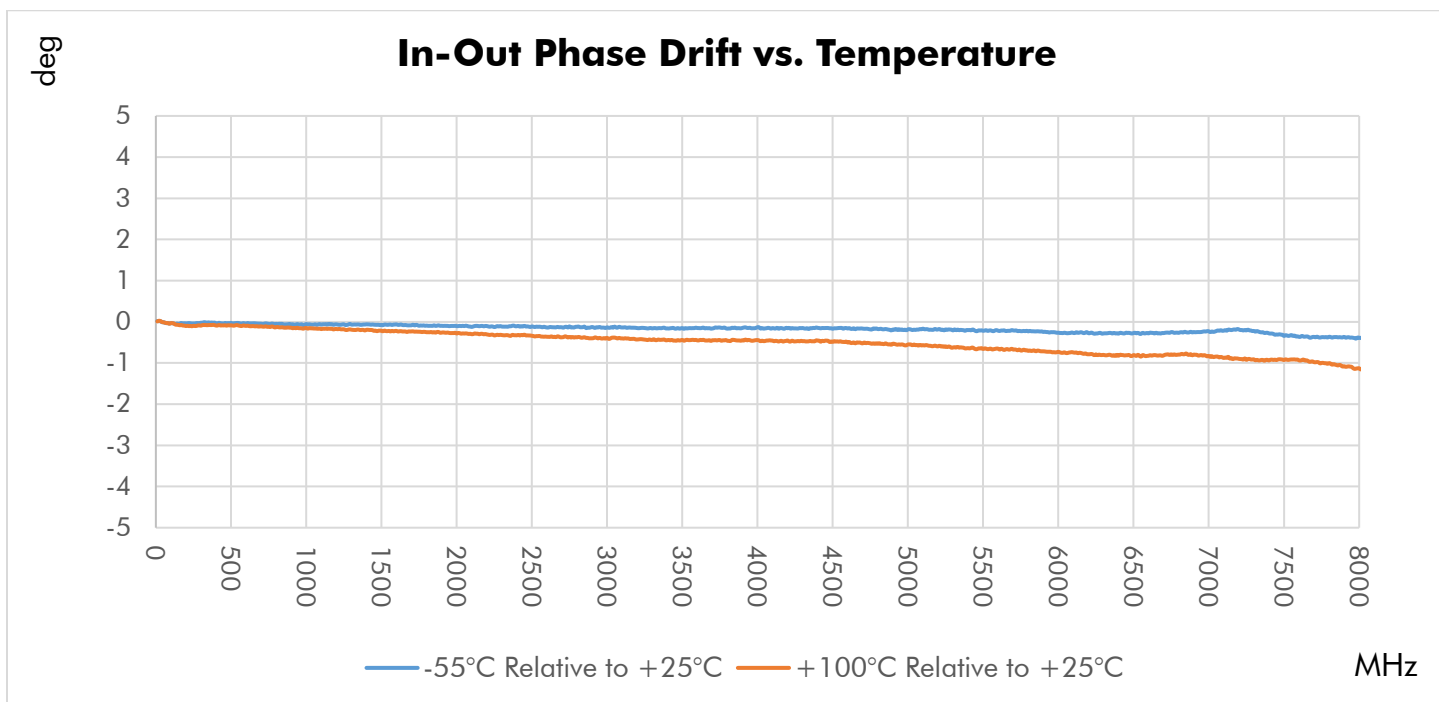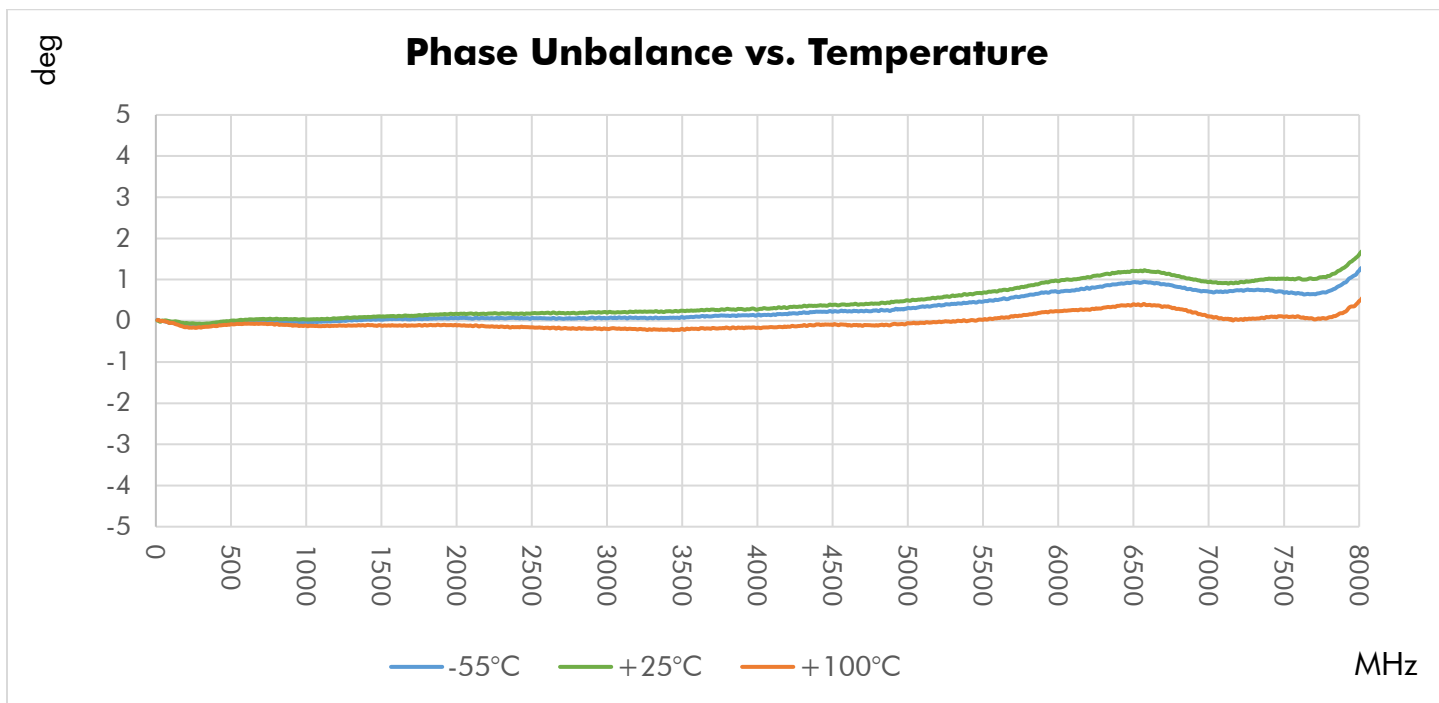


Reliability Testing

RF power test was performed to determine the input power required to produce a nominal temperature rise of 20°C at the hottest point. The test was performed at room temperature without forced air. A heatsink was not used unless it came standard with the product.


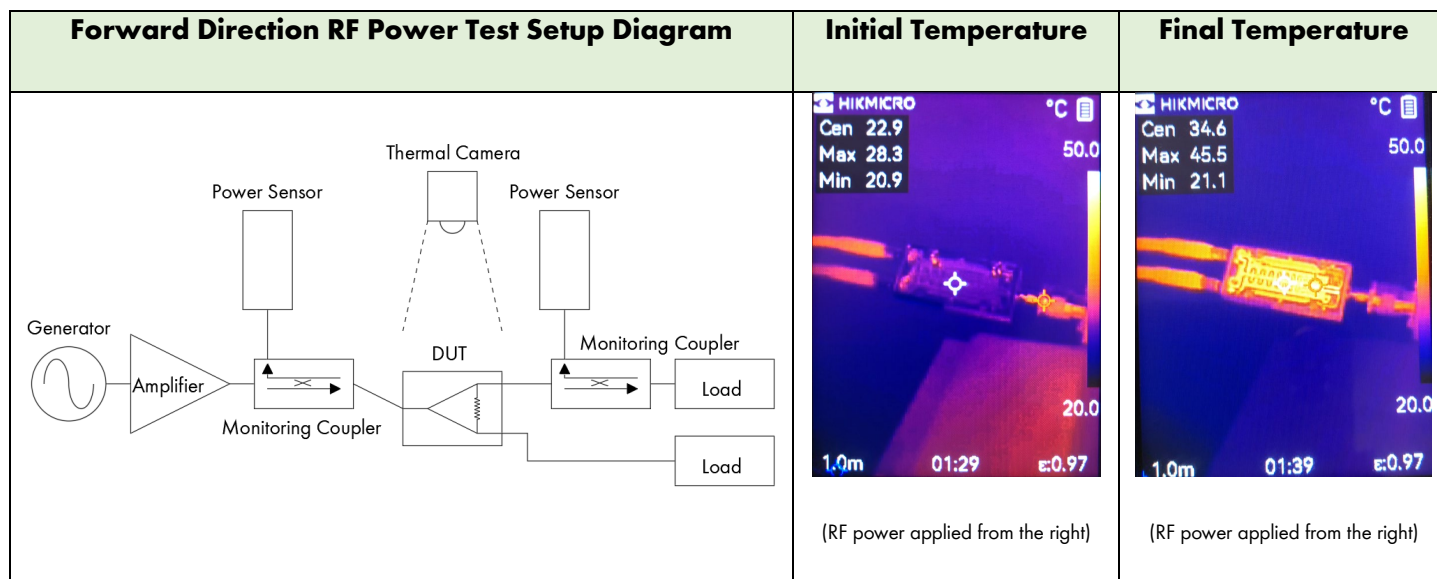




- 100 watts CW at 500MHz was applied to the DUT input for a duration of 10 minutes.
- The DUT temperature increased from 22.9°C (initial, center marker) to 45.5°C (final, max marker), resulting in a 22.6°C rise.

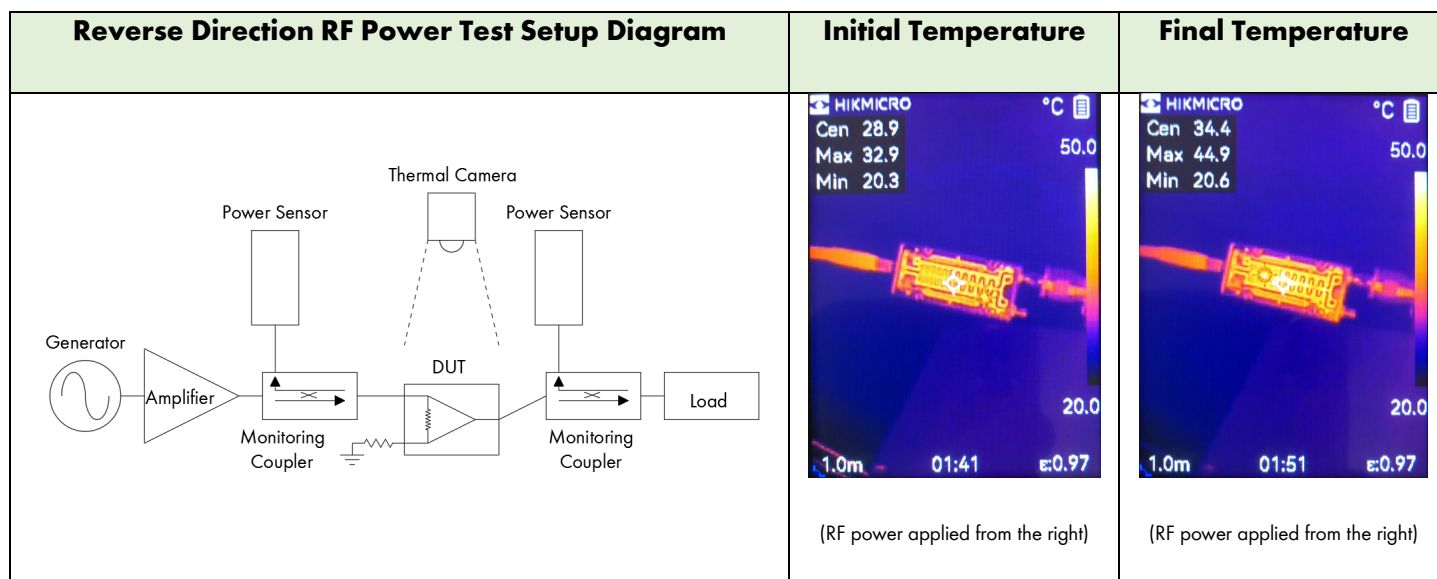

- 3 watts CW at 500MHz was applied to the DUT output for a duration of 10 minutes.
- The DUT temperature increased from 28.9°C (initial, center marker) to 44.9°C (final, max marker), resulting in a 16.0°C rise.

Repeatability in Production

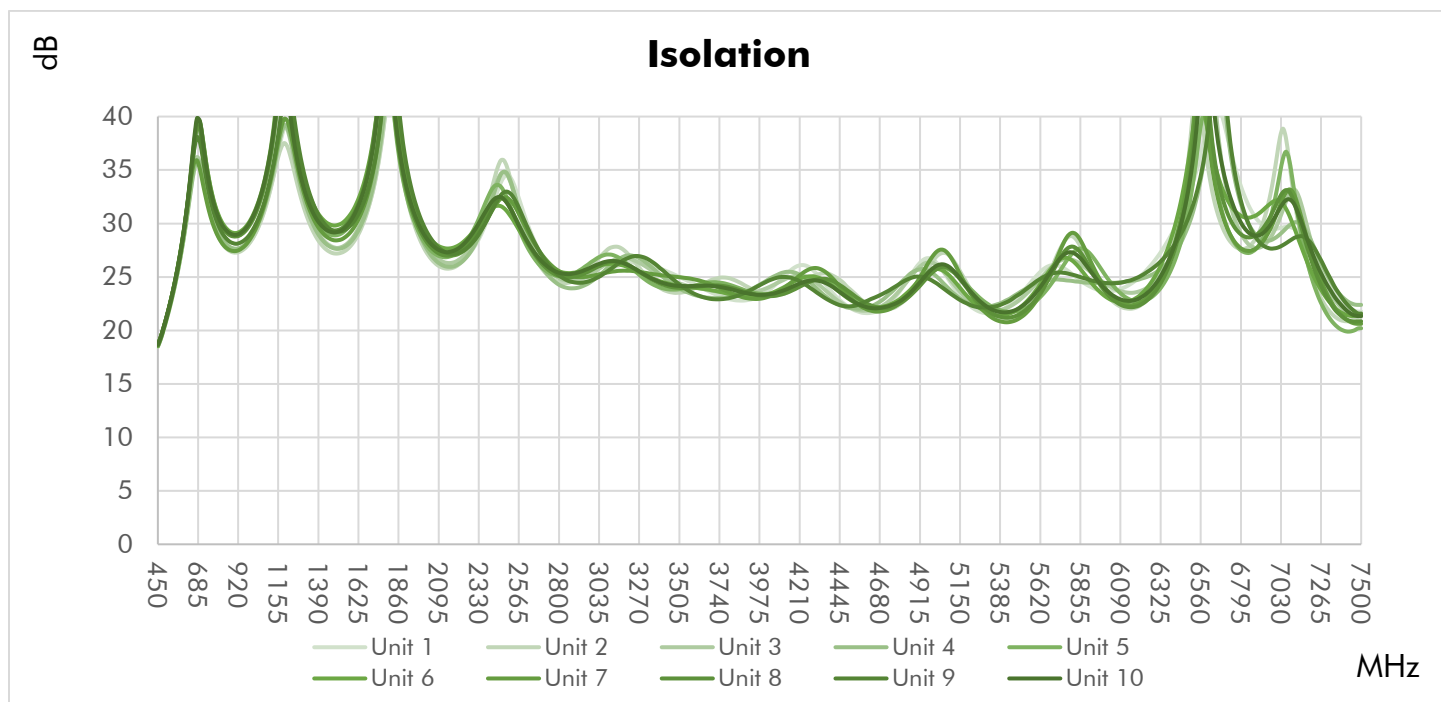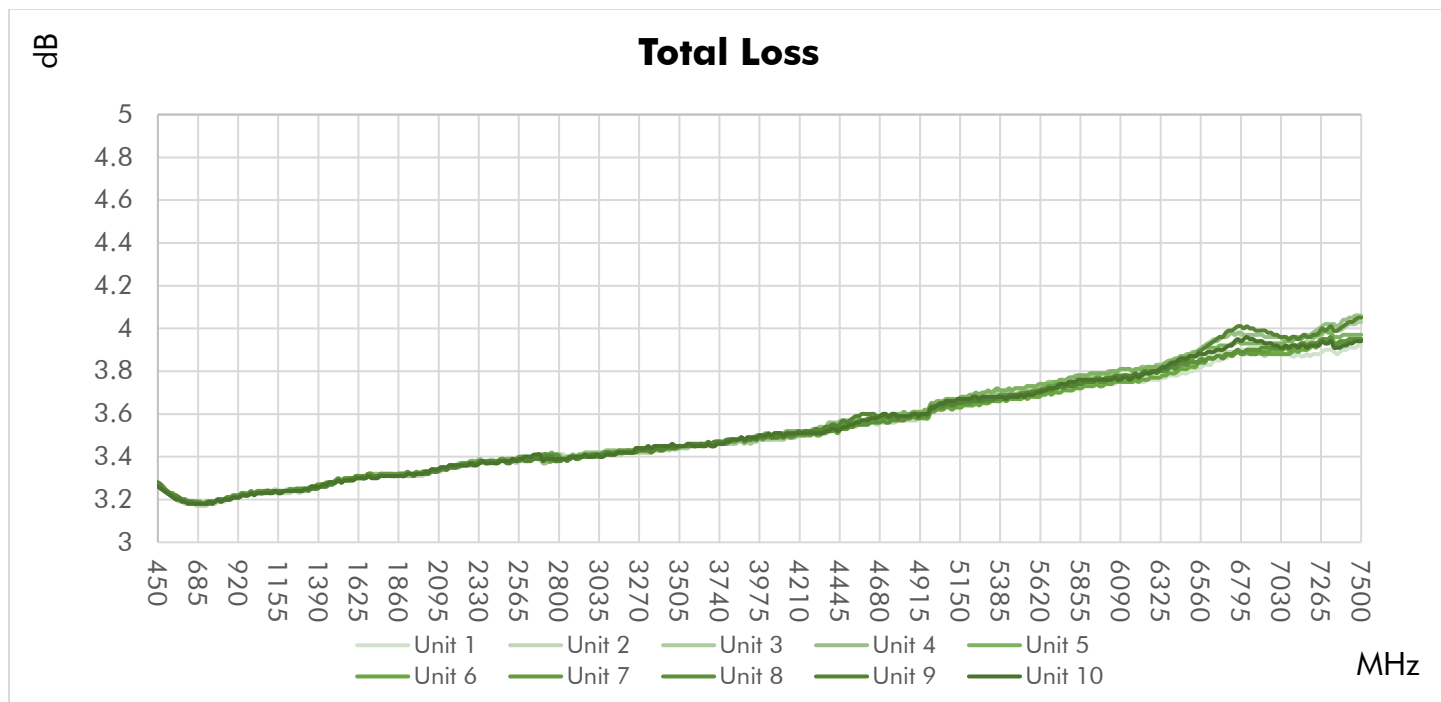


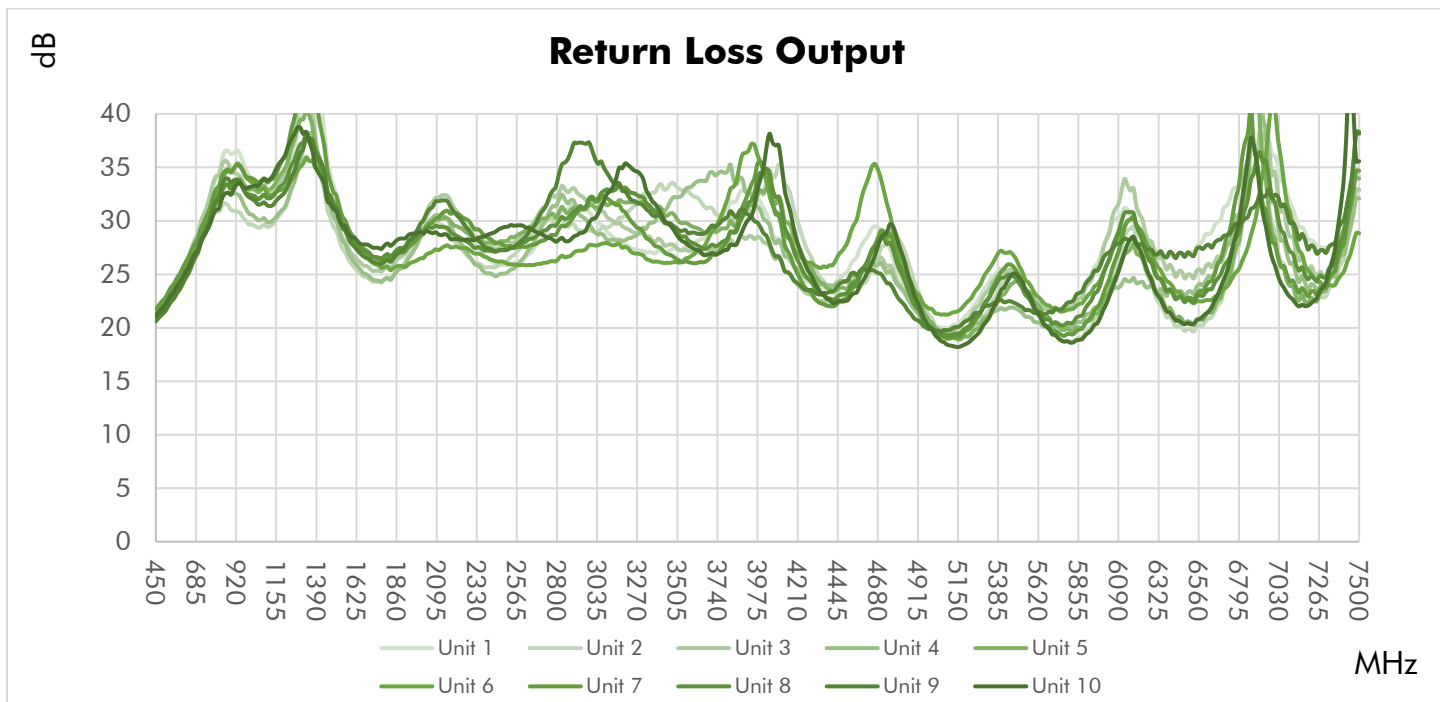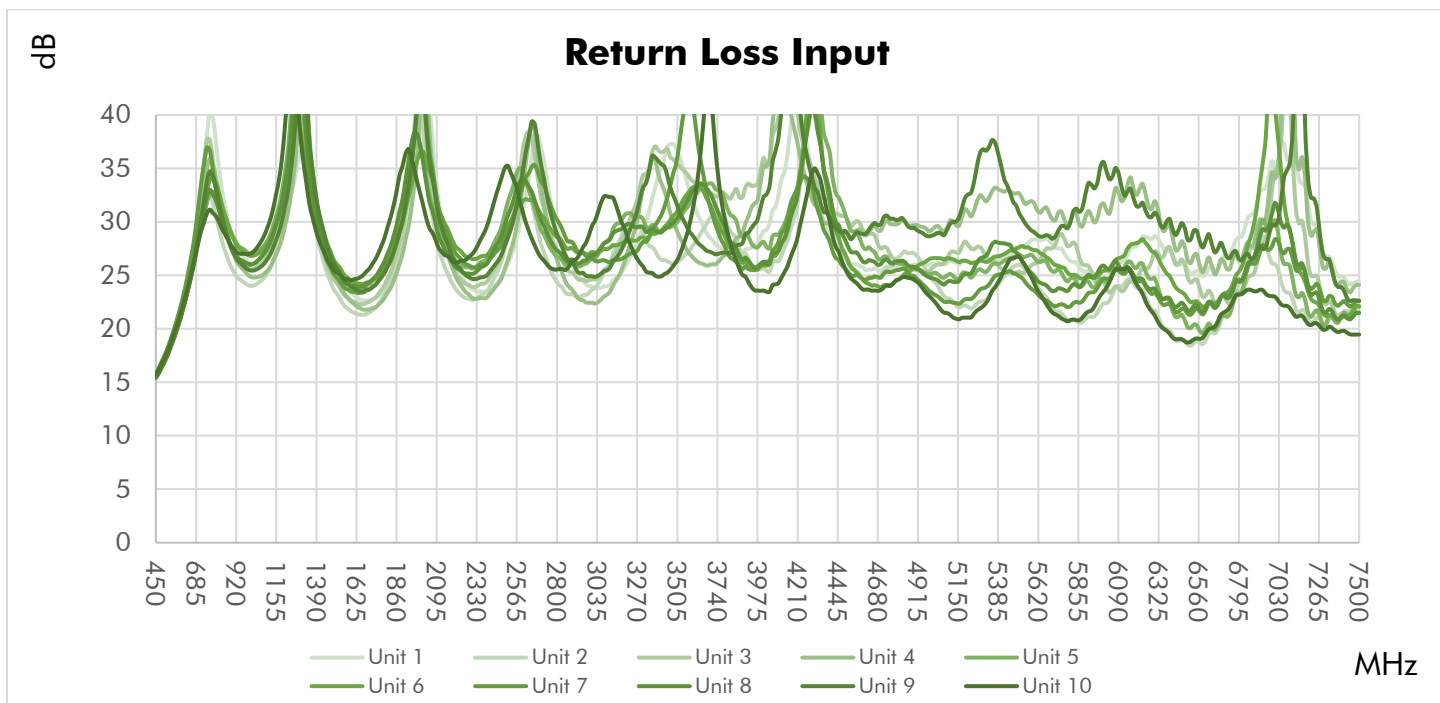


Typical Performance Data

Frequency (MHz)	Return Loss (dB)			Total Loss (dB)		Isolation (dB)
	Port S	Port 1	Port 2	S-1	S-2	
440	15.5	21.4	21.3	3.3	3.3	18.1
798	33.4	32.1	31.9	3.2	3.2	30.0
1156	31.7	34.6	34.5	3.2	3.2	42.7
1514	24.5	30.7	31.4	3.3	3.3	28.7
1872	30.7	26.9	27.2	3.3	3.3	36.1
2230	25.2	28.1	28.6	3.3	3.3	28.3
2588	33.7	28.2	28.0	3.4	3.4	28.5
2946	25.6	30.2	28.6	3.4	3.4	26.1
3304	28.8	31.7	28.7	3.4	3.5	24.7
3662	41.4	26.3	25.1	3.5	3.5	24.9
4020	26.3	29.4	28.5	3.5	3.6	22.8
4378	30.8	21.1	21.0	3.6	3.6	25.5
4736	24.1	25.1	25.5	3.7	3.7	21.7
5094	22.9	18.0	18.2	3.7	3.7	26.9
5452	24.9	24.6	26.4	3.8	3.7	21.4
5810	23.8	20.4	20.9	3.8	3.7	28.0
6168	23.6	31.4	39.0	3.7	3.7	23.0
6526	22.5	23.2	22.5	3.8	3.8	43.0
6884	30.8	33.9	30.5	3.8	3.9	29.8
7242	22.5	25.2	24.2	3.8	3.9	24.8
7600	24.4	29.7	31.8	3.9	4.0	22.3

Simplified Electrical Schematic

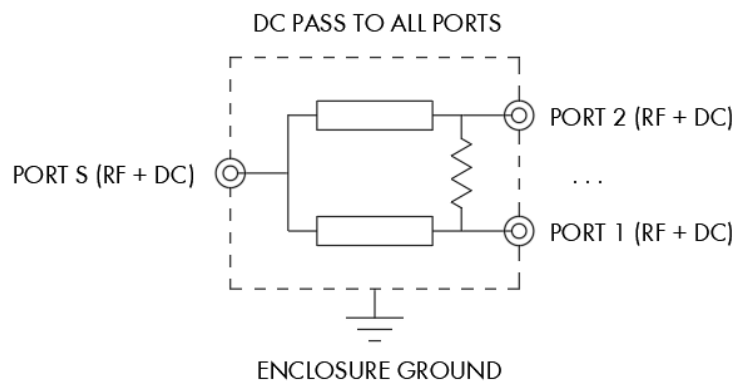

Outline Dimensions

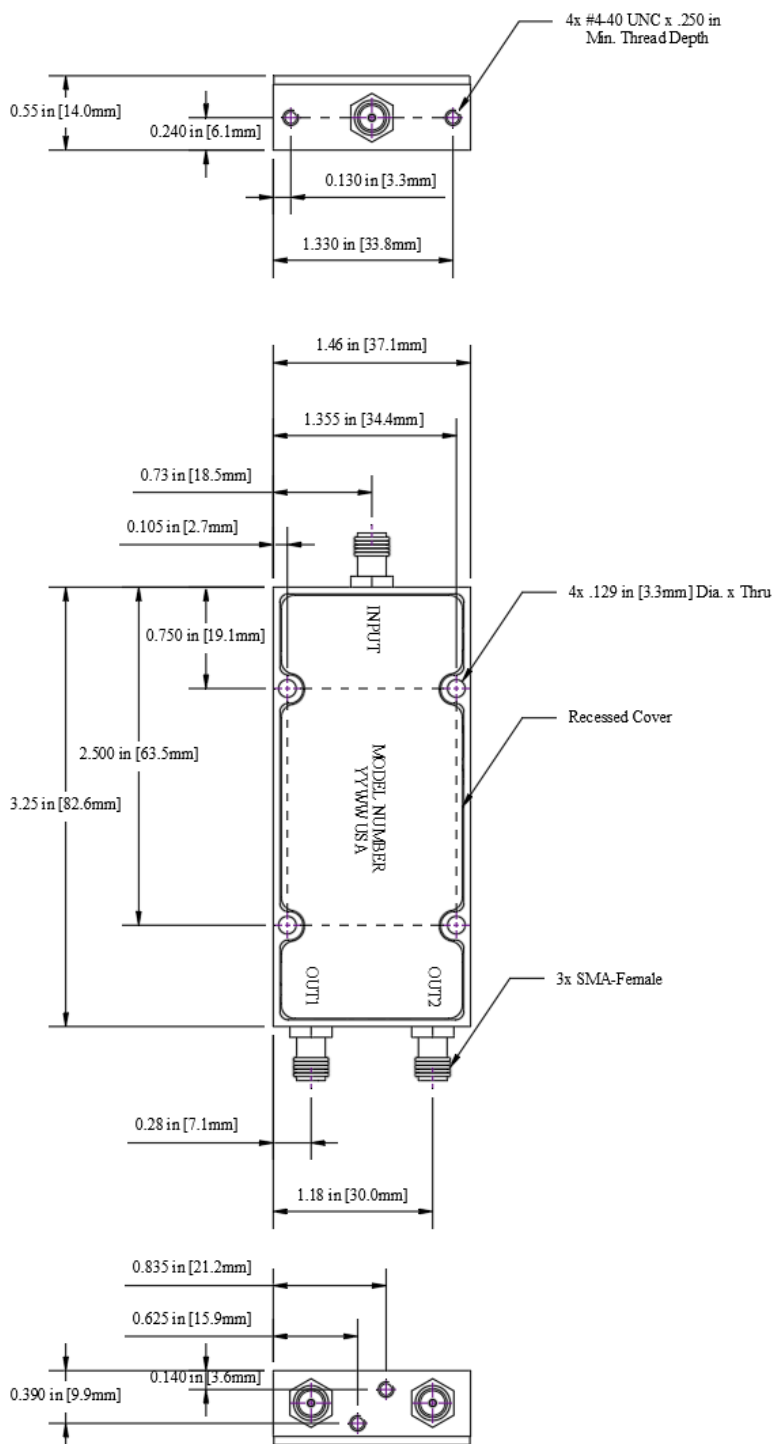

Outline drawing: OL-2074

Dimensions are in inches, [mm] shown for convenience.

Tolerances on 2-pl decimals: ± 0.03 . 3-pl decimals: ± 0.015 .

The information contained in this document is accurate to the best of our knowledge and representative of the product described herein at the date of publication. It may be necessary to make modifications to the product and/or documentation of the product. Werbel Microwave LLC reserves the right to make such changes as required without notice. Unless otherwise stated, all specifications and dimensions are nominal. Werbel Microwave LLC does not make any representation or warranty regarding the suitability of the product described herein for any particular purpose or application, and Werbel Microwave LLC does not assume any liability arising out of the use of any part of documentation. This document gives only a description of the product(s) and shall not form part of any contract. Please contact a Werbel Microwave LLC Applications Engineer for the most current specification drawing.

Reliability testing was performed as an internal requalification of the product to substantiate the published specifications, which were previously arrived at by calculation and/or similarity to existing products. The results of these tests are provided as a courtesy and shall not form part of a contract or warranty. While reliability tests may depict the product being tested beyond the published specification ratings for the purpose of stress testing the product, this does not imply that the product should be operating above the rated limits for any length of time. Specifications related to reliability (e.g., performance over temperature, power handling, DC current, HI-POT) are "designed to meet" and are not individually tested in production of commercially available products. Please contact a Werbel Microwave LLC Applications Engineer if specific reliability testing is needed on a particular product.